





























TRUCK TYRES

barkleytyres.com



BARKLEY

CONTENT

| | | | |
|--|----|---|----|
| About Barkley | 04 | Trailer | 22 |
| Why you should choose Barkley | 05 |  BL207 | 23 |
| Recommended uses | 06 |  BL209 | 23 |
| Steering axle | 08 |  BL210 | 24 |
|  BL203+ | 09 |  BL212 | 24 |
|  BL207 | 10 |  BL605 | 25 |
|  BL208 | 11 |  BL609 | 25 |
|  BL209 | 11 |  BL606 | 26 |
|  BL210 | 12 |  BLT03 | 27 |
|  BL212 | 13 |  BLT05 | 27 |
|  BL216 | 13 |  BLT08 | 28 |
|  BL219 | 14 |  BLT16 | 28 |
|  BLW12 | 14 | All axles | 30 |
|  BLT03 | 15 |  BL601 | 31 |
| Drive axle | 16 |  BL621 | 31 |
|  BL806+ | 17 | Barkley online | 32 |
|  BL808 | 18 | Technical specifications | 34 |
|  BL836 | 18 | | |
|  BL826+ | 19 | | |
|  BLW18 | 20 | | |

Want to find the tyre you are looking for quickly and easily? We can help you online and in person.



TRUCK TYRES WITH THE BEST PRICE PER KILOMETRE

An attractive price is very important, right? But you want certainty about the quality of your truck and trailer tyres. That's why you should opt for Barkley! Just like our agricultural and OTR tyres, our truck and trailer tyres also offer a fantastic price/quality ratio. This helps to ensure the best price per kilometre. And our modern tyres comply with all rules and requirements in the European market. You will also receive a comprehensive range and excellent service. So, by choosing us, you will be getting more than just great tyres.

Cost-effective driving and the lowest possible operating costs: let us take care of it! Our truck and trailer tyres have been constructed to the highest standard, so they have a more robust belt and a casing structure that runs up to the rim. Safer on the road, very low rolling resistance, a uniform wear pattern and a very strong shoulder: these are the properties offered by our truck tyres!

The extras you receive from Barkley include perfect service, fast delivery and the best possible advice.

CHOOSING FOR BARKLEY MEANS CHOOSING MORE THAN JUST A TYRE



Complete range of truck, agricultural and OTR tyres




Great quality tyres that meet European norms



Affordable: excellent price per operating hour



Quickly available from stock



Specialised knowledge about tyres and uses




TRUCK

AGRICULTURAL

OTR

TRUCK TYRES - RECOMMENDED USES

Barkley offers a massive range of commercial vehicle tyres for almost every purpose. Its range includes a broad selection of market-relevant tyre sizes and patterns for light and heavy-duty trucks and trailers - tyres for steer axles, drive axles and trailer axles. There are patterns for every purpose: long distance or regional use, mixed use, onroad and offroad, in urban areas or for hard winter use. All tyres meet the expectations which people have nowadays for modern, top quality tyres with a long service life; while also providing quality at an extremely economical price.



Regional traffic

Use on A and B roads, with regular accelerating and braking. Short distances and lots of stops characterise typical distribution/delivery usage (also suitable for combination long distance/distribution use).



Long distance traffic

Long distances which can be travelled using A-roads and motorways at almost constant speed with few interruptions (not much accelerating or frequent braking).



Onroad/offroad traffic

The focal point here is mixed traffic, both beyond paved roads and for use on construction sites as necessary, with all the resultant challenges faced by the equipment used in such environments.




Winter

Tyres bearing the M+S marker and/or the industrial "snowflake" symbol have been developed especially for use under all winter conditions - snow and ice, and mud and rain - at low temperatures.

TRUCK TYRES - PATTERNS

| | Regional traffic | Long distance traffic | Onroad / offroad traffic | Winter |
|---------------|---|--|--|--|
| Steering axle | <ul style="list-style-type: none"> BL203+ 09 BL207 10 BL208 11 BL209 11 BL210 12 BL212 13 BL216 13 BL219 14 | <ul style="list-style-type: none"> BLT03 15 | | <ul style="list-style-type: none"> BLW12 14 |
| Drive axle | <ul style="list-style-type: none"> BL806+ 17 BL808 18 BL836 18 | | <ul style="list-style-type: none"> BL826+ 19 | <ul style="list-style-type: none"> BLW18 20 |
| Trailer | <ul style="list-style-type: none"> BL207 23 BL209 23 BL210 24 BL212 24 BL605 25 BLT05 27 BLT08 28 BLT16 28 | <ul style="list-style-type: none"> BLT03 27 | <ul style="list-style-type: none"> BL609 25 BL606 26 | |
| All axles | | | <ul style="list-style-type: none"> BL601 31 BL621 31 | |

STEERING AXLE



You want safety and comfort when on the road. And that's exactly what Barkley steering axle tyres offer you! We guarantee tyres without radial runout, which ensures you 100% comfort. Good quality and far-reaching safety go hand-in-hand with the best price per kilometre!


We know exactly what you require. That is why we have developed the new BL203+ for an even better performance.

The perfect pattern and balanced rubber compound allow you to make the most of these great tyres.

TRUCK TYRES - STEERING AXLE

Barkley BL203+ HL steering axle tyre with 3PMSF

The Barkley BL203+ steering axle tyre is currently available in five sizes. The BL203+ offers improved load-bearing capacity (HL – High Load) and features M+S coding. This means the tyres can deal with higher steering-axle loads experienced by Euro-6 trucks in all markets.



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S / | | | | | |
|-------------|---------------------|-------|-------|--|---|---|---|----|
| 295/60R22.5 | 150/147L | TL | M+S / | | D | B | B | 73 |
| 295/80R22.5 | 154/149M | TL | M+S / | | D | B | B | 73 |
| 315/60R22.5 | 154/150L (152/148M) | TL | M+S / | | D | B | B | 73 |
| 315/70R22.5 | 156/150L (154/150M) | TL | M+S / | | D | B | B | 73 |
| 315/80R22.5 | 158/150L (154/150M) | TL | M+S / | | D | B | B | 73 |

View the technical specifications of this tyres on page 34-37



- ▶ Extremely stable shoulder and improved stability in turns
- ▶ Extra-wide uniform tread for larger contact surface
- ▶ High load version for Euro-6 vehicles
- ▶ Better rolling behaviour and more uniform wear pattern



BL203+

TRUCK TYRES - STEERING AXLE

BL207 - Steering axle

The Barkley BL207 steer axle tyre is currently available in 6 sizes. The BL207 has the 3PMSF coding which means that the tyre complies with the regulations required in all EU countries. Due to the profile designed specifically for the steer axle, the tyre is ideally suited for shunting and turning in tight spaces.



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 205/75R17.5 | 124/122M | TL | M+S/ | E | C | B | 73 |
| 245/70R19.5 | 136/134M | TL | M+S/ | E | C | B | 73 |
| 265/70R19.5 | 140/138M | TL | M+S/ | E | C | B | 73 |
| 285/70R19.5 | 146/144M | TL | M+S/ | E | C | B | 73 |
| 255/70R22.5 | 140/137M | TL | M+S/ | E | C | B | 73 |
| 275/70R22.5 | 150/148M | TL | M+S/ | E | C | B | 73 |

View the technical specifications of this tyres on page 34-37



BL207


- ▶ Accurate steering thanks to pattern designed specially for steering axles
- ▶ Ideal for twisting and turning in small spaces
- ▶ Uniform wear ensures higher kilometrage
- ▶ Excellent performance and efficiency in existing vehicle fleet



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|---------|-----------|-------|------|---|---|---|----|
| 10R22.5 | 144/142L | TL | M+S | D | C | B | 72 |

View the technical specifications of this tyres on page 34-37



BL208


- ▶ Whole construction is well designed, including casing
- ▶ Improved stability in bends thanks to stable shoulder
- ▶ Ideal for twisting and turning in small spaces
- ▶ Uniform wear ensures higher mileage



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|----------|-----------|-------|------|---|---|---|----|
| 9.5R17.5 | 129/127M | TL | M+S/ | E | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL209

- ▶ Accurate steering behaviour thanks to special pattern on steering axle version
- ▶ For ideal grip and greater resistance against damage
- ▶ Stable shoulder, which gives better stability in bends
- ▶ Suitable for twisting and turning (manoeuvres) in small spaces



AVAILABLE SIZE


| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 215/75R17.5 | 126/124M | TL | M+S/ | E | B | B | 72 |

View the technical specifications of this tyres on page 34-37



BL210

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Energy-efficiency due to lower rolling resistance



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 235/75R17.5 | 132/130M | TL | M+S/ | E | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL212


- ▶ Wide tread and large contact area for improved safety
- ▶ Accurate steering thanks to specially designed steering axle pattern
- ▶ Stable shoulder, which gives better stability in bends



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 275/80R22.5 | 149/146M | TL | M+S | D | C | B | 73 |

View the technical specifications of this tyres on page 34-37

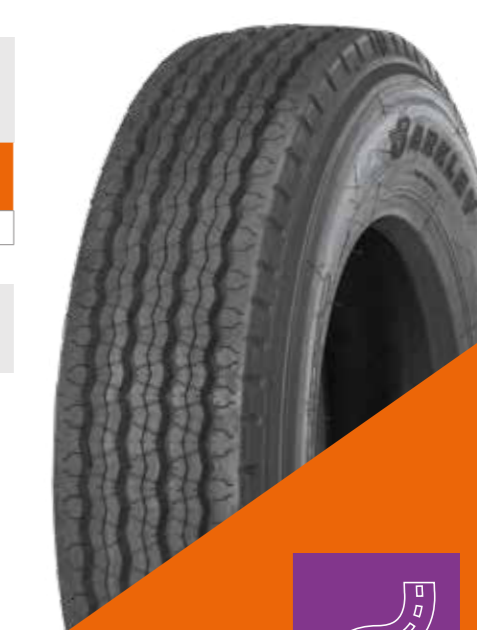

BL216

- ▶ Long life-span and excellent resistance against damage
- ▶ Uniform pressure distribution across tyre's contact surface
- ▶ Extra safety thanks to constant grip



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 385/65R22.5 | 164J | TL | M+S | C | C | B | 73 |

View the technical specifications of this tyres on page 34-37



BL219

- ▶ Accurate steering thanks to pattern designed specially for steering axles
- ▶ Extremely stable shoulder and improved stability in bends
- ▶ Excellent life-span and performance



AVAILABLE SIZES


| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|---------------------|-------|-------|---|---|---|----|
| 295/80R22.5 | 154/149M | TL | M+S / | E | C | B | 75 |
| 315/70R22.5 | 156/150L (154/150L) | TL | M+S / | E | C | B | 75 |
| 315/80R22.5 | 158/150L (154/150L) | TL | M+S / | E | C | B | 75 |
| 385/55R22.5 | 160K/158L | TL | M+S / | E | C | B | 75 |
| 385/65R22.5 | 160K/158L | TL | M+S / | E | C | B | 75 |

View the technical specifications of this tyres on page 34-37



BLW12

- ▶ Latest 3D strip technology ensures excellent grip
- ▶ Special rubber compound for ideal traction, particularly at temperatures below zero degrees Celsius
- ▶ High load version for Euro-6 vehicles
- ▶ Available in 5 different sizes



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 305/70R19.5 | 148/145M | TL | M+S/ | C | B | B | 73 |


View the technical specifications of this tyres on page 34-37



BLT03

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Energy-efficiency due to lower rolling resistance

DRIVE AXLE



Are your drive axle tyres ineffective when it comes to transferring engine torque to the road surface? Then it's about time you switched to Barkley tyres! For example, we have specially developed our BL806+ for heavy braking loads and dual assembly. Because we like to help you with new ideas. We believe quality is a

must because drive axle tyres occupy one of the most important positions on a truck - perhaps the most important position.

Tyres used for this axle position play a major role in determining fuel efficiency, grip and safety.

TRUCK TYRES - DRIVE AXLE

Wider tread for better performance

Barkley has established a strong reputation in truck (steering and drive axles) and trailer tyres within a very short space of time.

One advantage shared by all these Barkley tyres is the ability to upgrade to an extra-wide tread. This tread offers allows the **BL806+** to offer even better performance, while the patterns and rubber compound ensure maximum benefits during use. Barkley has developed a tyre which is in great demand among European users.

Barkley has deliberately opted for tyres with a wider tread in the truck and trailer market. This is a major innovation, which allows users to achieve better kilometrages.



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|---------------------|-------|-------|---|---|---|----|
| 295/60R22.5 | 150/147L | TL | M+S / | D | C | B | 73 |
| 295/80R22.5 | 152/148M | TL | M+S / | D | C | B | 73 |
| 315/60R22.5 | 152/148M | TL | M+S / | D | B | B | 73 |
| 315/70R22.5 | 154/150L (152/148M) | TL | M+S / | D | C | B | 73 |
| 315/80R22.5 | 156/150L (154/150M) | TL | M+S / | D | C | B | 73 |


View the technical specifications of this tyres on page 34-37



- ▶ Larger contact surface improves safety and decreases braking distance
- ▶ Six-row tread pattern ensures uniform wear pattern
- ▶ Ideal grip and better resistance against damage
- ▶ New rubber compound offers high kilometrage



BL806+



AVAILABLE SIZES


| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 215/75R17.5 | 126/124M | TL | M+S / | E | B | B | 73 |
| 235/75R17.5 | 132/130M | TL | M+S / | E | B | B | 73 |
| 285/70R19.5 | 146/144M | TL | M+S / | E | B | B | 73 |



BL808

- ▶ Safe road behaviour thanks to wide tread
- ▶ Shorter braking distance thanks to larger contact surface
- ▶ Ideal grip in almost all weather conditions

View the technical specifications of this tyres on page 34-37



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 245/70R17.5 | 136/134M | TL | M+S / | E | C | B | 73 |



BL836

- ▶ Drive axle suitable for on/off construction traffic
- ▶ Extra deep tread for maximum grip
- ▶ Extra deep tread for maximum grip
- ▶ Good cleaning performance due to special tread design

View the technical specifications of this tyres on page 34-37

BL826+

The Barkley **BL826+** is the new drive axle tyre suitable for on/off-road use. Due to the new tread design the tyre has a very high self-cleaning capacity which in turn benefits the performance. The tyre is very suitable for use in tough conditions and is available in the two most popular sizes in this segment.



AVAILABLE SIZES


| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 13R22.5 | 156/150K | TL | M+S / | D | B | B | 73 |
| 315/80R22.5 | 156/150K | TL | M+S / | D | B | B | 73 |



BL826+

- ▶ Robust, durable, safe and reliable
- ▶ Exceptional grip on stones, sand and mud
- ▶ The tread design helps to offer excellent self-cleansing properties
- ▶ The structure of the casing and side wall is ideal for special applications

View the technical specifications of this tyres on page 34-37



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 295/80R22.5 | 152/148M | TL | M+S / | E | C | B | 73 |
| 315/70R22.5 | 152/148M | TL | M+S / | E | C | B | 73 |
| 315/80R22.5 | 156/150L | TL | M+S / | E | C | B | 73 |

View the technical specifications of this tyres on page 34-37



- ▶ Profile blocks in the pattern ensure traction, grip and good braking under all circumstances
- ▶ Special rubber compound for ideal traction, particularly at temperatures below zero degrees Celsius
- ▶ Special strips improve wear pattern and prevent tears
- ▶ The solution for the whole transport sector in winter conditions



BLW18

WE DELIVER ALSO YOUR AGRICULTURAL TYRES

Contact us for personal advice:

info@barkleytyres.com

+31 (0)523 850 850



TRUCK




AGRICULTURAL



OTR



TRAILER



It's not easy for tyres to cope with all these static and dynamic loads, while also offering low rolling resistance. Nonetheless, we have managed to do it with our BLTo8! Specially developed for your trailers. Good stability, high kilometres and featuring the M+S marking. All to your benefit!

Want even better cost-effectiveness? Barkley's trailer tyres can often be given a second life. A new tread can be applied if the casing is still in good condition.

This offers you many extra (safe) kilometres at a low price per kilometre.

TRUCK TYRES - TRAILER



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S / | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 265/70R19.5 | 143/141J | TL | M+S / | E | C | B | 73 |
| 285/70R19.5 | 150/147J | TL | M+S / | E | C | B | 73 |

View the technical specifications of this tyres on page 34-37



BL207

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Pattern design ensures a long life-span



AVAILABLE SIZE


| Size | L/S-index | TL/TT | M+S / | | | | |
|----------|-----------|-------|-------|---|---|---|----|
| 9.5R17.5 | 143/141J | TL | M+S / | E | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL209

- ▶ Low rolling resistance thanks to optimised rubber compound, which means more kilometres
- ▶ High resistance against damage and collisions
- ▶ Long life-span thanks to optimised contact surface and improved wear pattern



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 215/75R17.5 | 135/133J | TL | M+S / | E | B | B | 72 |

View the technical specifications of this tyres on page 34-37



BL210

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Energy-efficiency due to lower rolling resistance



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 425/65R22.5 | 165J | TL | M+S | D | B | B | 72 |

View the technical specifications of this tyres on page 34-37



BL605

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Pattern design ensures a longer life-span



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 235/75R17.5 | 143/141J | TL | M+S / | E | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL212

- ▶ Low rolling resistance thanks to optimised rubber compound, which means more kilometres
- ▶ High resistance against damage and collisions
- ▶ Long life-span thanks to optimised contact surface and improved wear pattern



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|---------------------|-------|------|---|---|---|----|
| 235/75R17.5 | 143/141J (144/144F) | TL | M+S | E | C | B | 72 |
| 245/70R17.5 | 143/141J (144/144F) | TL | M+S | E | C | B | 72 |

View the technical specifications of this tyres on page 34-37



BL609

- ▶ Extremely durable casing, resistant against almost all loads
- ▶ The tread ensures extreme solidity
- ▶ Rubber mix suitable for various circumstances
- ▶ Ideal for flatbed trailers, wood transporters and trailers for mixed and heavy-duty use

TRUCK TYRES - TRAILER

BL606

The trailer tyre from Barkley that is suitable for use on construction sites. The Barkley BL606 is available in 4 sizes. The tyre has the required M+S and 3PMSF coding so that it meets the EU requirements. The extra wide tread grooves ensure that the tyre has excellent water dispersal.



AVAILABLE SIZES


| Size | L/S-index | TL/TT | M+S / | | | | | |
|-------------|-----------|-------|-------|--|---|---|---|----|
| 385/55R22.5 | 160J | TL | M+S / | | D | B | B | 73 |
| 385/65R22.5 | 164J | TL | M+S / | | D | B | B | 73 |
| 425/65R22.5 | 165J | TL | M+S / | | D | B | B | 73 |
| 445/65R22.5 | 169J | TL | M+S / | | D | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL606


- ▶ A side wall that combines robustness and flexibility - ideal for construction sites
- ▶ Stable road-holding, also on muddy and soft surfaces
- ▶ High stability, which means effective manoeuvring - also with extremely small turning circles
- ▶ Extra-wide pattern grooves, which ensure excellent water discharge



AVAILABLE SIZE


| Size | L/S-index | TL/TT | M+S / | | | | | |
|-------------|-----------|-------|-------|--|---|---|---|----|
| 385/55R19.5 | 156J | TL | M+S / | | C | B | B | 73 |
| 435/50R19.5 | 160J | TL | M+S / | | C | B | B | 73 |
| 445/45R19.5 | 160J | TL | M+S / | | C | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BLT03

- ▶ Very solid casing
- ▶ Strong rubber compound for uniform wear
- ▶ Energy-efficiency due to lower rolling resistance



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S / | | | | | |
|-------------|-------------|-------|-------|--|---|---|---|----|
| 385/55R22.5 | 160J (158L) | TL | M+S | | D | B | B | 72 |

View the technical specifications of this tyres on page 34-37



BLT05

- ▶ Five longitudinal grooves ensure effective water discharge on wet road surfaces
- ▶ Larger contact surface ensures extra-safe road behaviour
- ▶ Energy-efficient rubber compounds help to improve performance



AVAILABLE SIZE


| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-------------|-------|------|---|---|---|----|
| 385/65R22.5 | 160K (158L) | TL | M+S/ | D | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BLT08

- ▶ Pattern design ensures a long life-span
- ▶ Excellent alternative to premium brands
- ▶ Highly resistant against shear forces
- ▶ Environment-friendly thanks to innovative technologies
- ▶ Effective performance, e.g. long life-span thanks to proven quality



AVAILABLE SIZE

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|------|---|---|---|----|
| 245/70R17.5 | 143/141J | TL | M+S | D | B | B | 72 |

View the technical specifications of this tyres on page 34-37



BLT16

- ▶ Trailer tyre for regional use
- ▶ Extra strong carcass for good puncture and damage resistance
- ▶ Strong shoulder ensures even wear

FOR EARTHMOVING TYRES WE ARE ALSO YOUR PARTNER

Contact us for personal advice:

info@barkleytyres.com

+31 (0)523 850 850


TRUCK

AGRICULTURAL

OTR



ALL AXLES




We love true all-rounders. Tyres that must perform effectively on all axles. Do you often work on construction sites or civil engineering projects? Then you know that site conditions can vary greatly! That's why Barkley has developed the BL621: a tyre that is suitable for all axles. In addition, it can also resist heavy loads, friction in tight bends and sharp obstacles

off-road. That's a promise! Experience the very high durability of these tyres for yourself. We have already witnessed it during our tests.

You will see that they offer the maximum productivity and effective price per kilometre you have been looking for!

TRUCK TYRES - ALL AXLES



AVAILABLE SIZES


| Size | L/S-index | TL/TT | M+S/ | | | | |
|----------|-----------|-------|-------|---|---|---|----|
| 11R22.5 | 148/145K | TL | M+S / | D | B | B | 72 |
| 12R22.5 | 152/148K | TL | M+S / | D | B | B | 72 |
| 12.00R24 | 156/153K | TL | M+S / | D | B | B | 72 |
| 12.00R24 | 156/153K | TT | M+S / | D | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL601

- ▶ Secure driving behaviour on hard as well as soft, muddy surfaces
- ▶ Very good drainage of water and mud thanks to wide profile grooves
- ▶ Strong outer-shoulder structure ensures improved performance and traction



AVAILABLE SIZES

| Size | L/S-index | TL/TT | M+S/ | | | | |
|-------------|-----------|-------|-------|---|---|---|----|
| 13R22.5 | 156/150K | TL | M+S / | D | B | B | 73 |
| 315/80R22.5 | 158/150K | TL | M+S / | D | B | B | 73 |

View the technical specifications of this tyres on page 34-37



BL621

- ▶ The structure of the pattern design offers maximum traction and improved kilometrage
- ▶ Secure driving behaviour on hard as well as soft, muddy surfaces
- ▶ Strong shoulder structure for improved performance and traction
- ▶ Optimised pattern for reduced stone build-up

BARKLEY IS ALSO YOUR PARTNER ONLINE

barkleytyres.com


Knowledge, speed and convenience.

Visit barkleytyres.com to find information about the wide range of tyres we can offer you. You will also find more information about our brand, the sectors in which we operate and the technical background of our tyres.

Would you like to know if one of the tyres you saw online is actually compatible with your specific situation or purpose? Then please contact us for personal advice. We will always be able to assist you, be it online or in person.

**WE CAN ALWAYS HELP YOU,
BOTH ONLINE AND IN PERSON**

 barkleytyres.com

 +31 (0)523 850 850



TECHNICAL SPECIFICATIONS



BARKLEY
MADE IN CHINA
1401 1401 1401 1401 1401 1401

TECHNICAL SPECIFICATIONS

| Size | Pattern | L/S-index | L/S-index 2 | PR | TL/TT | M+S | 3PMSF | Position | Use | Fuel efficiency |
|-------------|---------|-----------|-------------|----|-------|-----|-------|------------|----------|-----------------|
| 9.5R17.5 | BL209 | 143/141J | | 18 | TL | M+S | 3PMSF | Trailer | Regional | E |
| 9.5R17.5 | BL209 | 129/127M | | 14 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 205/75R17.5 | BL207 | 124/122M | | 14 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 215/75R17.5 | BL210 | 135/133J | | 16 | TL | M+S | 3PMSF | Trailer | Regional | E |
| 215/75R17.5 | BL210 | 126/124M | | 14 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 215/75R17.5 | BL808 | 126/124M | | 14 | TL | M+S | 3PMSF | Drive axle | Regional | E |
| 235/75R17.5 | BL212 | 143/141J | | 18 | TL | M+S | 3PMSF | Trailer | Regional | E |
| 235/75R17.5 | BL609 | 143/141J | 144/144F | 18 | TL | M+S | | Trailer | On/Off | E |
| 235/75R17.5 | BL212 | 132/130M | | 14 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 235/75R17.5 | BL808 | 132/130M | | 14 | TL | M+S | 3PMSF | Drive axle | Regional | E |
| 245/70R17.5 | BL609 | 143/141J | 144/144F | 18 | TL | M+S | | Trailer | On/Off | E |
| 245/70R17.5 | BLT16 | 143/141J | | 18 | TL | M+S | | Trailer | Regional | D |
| 245/70R17.5 | BL836 | 143/141L | | 18 | TL | M+S | 3PMSF | Drive axle | Regional | E |
| 245/70R19.5 | BL207 | 136/134M | | 16 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 265/70R19.5 | BL207 | 143/141J | | 18 | TL | M+S | 3PMSF | Trailer | Regional | E |
| 265/70R19.5 | BL207 | 140/138M | | 16 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 285/70R19.5 | BL207 | 150/147J | | 18 | TL | M+S | 3PMSF | Trailer | Regional | E |
| 285/70R19.5 | BL207 | 146/144M | | 18 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 285/70R19.5 | BL808 | 146/144M | | 18 | TL | M+S | 3PMSF | Drive axle | Regional | E |
| 305/70R19.5 | BLT03 | 148/145M | | 18 | TL | M+S | 3PMSF | Trailer | Regional | C |
| 385/55R19.5 | BLT03 | 156J | | 18 | TL | M+S | 3PMSF | Trailer | Regional | C |
| 435/50R19.5 | BLT03 | 160J | | 20 | TL | M+S | 3PMSF | Trailer | Regional | C |
| 445/45R19.5 | BLT03 | 160J | | 20 | TL | M+S | 3PMSF | Trailer | Regional | C |
| 10R22.5 | BL208 | 144/142L | | 14 | TL | M+S | | Steer axle | Regional | D |
| 11R22.5 | BL601 | 148/145K | | 16 | TL | M+S | 3PMSF | All | On/Off | D |
| 12R22.5 | BL601 | 152/148K | | 16 | TL | M+S | 3PMSF | All | On/Off | D |
| 13R22.5 | BL621 | 158/156K | | 20 | TL | M+S | 3PMSF | All | On/Off | D |
| 13R22.5 | BL826+ | 156/150K | | 18 | TL | M+S | 3PMSF | Drive axle | On/Off | D |
| 255/70R22.5 | BL207 | 140/137M | | 16 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 275/70R22.5 | BL207 | 150/148M | | 18 | TL | M+S | 3PMSF | Steer axle | Regional | E |
| 275/80R22.5 | BL216 | 149/146M | | 16 | TL | M+S | | Steer axle | Regional | D |
| 295/60R22.5 | BL203+ | 150/147L | | 16 | TL | M+S | 3PMSF | Steer axle | Regional | D |
| 295/60R22.5 | BL806+ | 150/147L | | 16 | TL | M+S | 3PMSF | Drive axle | Regional | D |
| 295/80R22.5 | BL203+ | 154/149M | | 18 | TL | M+S | 3PMSF | Steer axle | Regional | D |
| 295/80R22.5 | BL806+ | 152/148M | | 16 | TL | M+S | 3PMSF | Drive axle | Regional | D |
| 295/80R22.5 | BLW12 | 154/149M | | 18 | TL | M+S | 3PMSF | Steer axle | Winter | E |
| 295/80R22.5 | BLW18 | 152/148M | | 16 | TL | M+S | 3PMSF | Drive axle | Winter | E |
| 315/60R22.5 | BL203+ | 154/150L | 152/148M | 18 | TL | M+S | 3PMSF | Steer axle | Regional | D |
| 315/60R22.5 | BL806+ | 152/148M | | 16 | TL | M+S | 3PMSF | Drive axle | Regional | D |

*While stocks last

| Grip on wet surface | Noise class | Noise emission (wave) | Width (mm) | Diameter (mm) | Load bearing radius (mm) | Rolling circumference (mm) | Tread depth (mm) | Recommended wheel | Bearing capacity per tyre | | Air pressure (bar) |
|---------------------|-------------|-----------------------|------------|---------------|--------------------------|----------------------------|------------------|-------------------|---------------------------|-------------|--------------------|
| | | | | | | | | | Single (kg) | Dual (kg) | |
| B | B | 73 | 240 | 842 | 391 | 2568 | 12 | 6.75 | 2720 | 2570 | 8.75 |
| B | B | 73 | 240 | 842 | 371 | 2568 | 12 | 6.75 | 1850 | 1750 | 7.5 |
| C | B | 73 | 205 | 753 | 353 | 2297 | 12.5 | 6 | 1600 | 1500 | 7.5 |
| B | B | 72 | 212 | 767 | 337 | 2339 | 12.5 | 6 | 2180 | 2060 | 8.5 |
| B | B | 72 | 212 | 767 | 337 | 2339 | 12.5 | 6.00 | 1700 | 1600 | 7.0 |
| B | B | 73 | 212 | 767 | 337 | 2339 | 15 | 6 | 1700 | 1600 | 7.0 |
| B | B | 73 | 233 | 797 | 353 | 2431 | 13 | 6.75 | 2720 | 2570 | 8.75 |
| C | B | 73 | 233 | 797 | 370 | 2430 | 14.5 | 6.75 | 2725 / 2800 | 2575 / 2800 | 8.75 |
| B | B | 73 | 233 | 797 | 353 | 2431 | 13 | 6.75 | 2000 | 1900 | 7.75 |
| B | B | 73 | 233 | 797 | 353 | 2431 | 15.5 | 6.75 | 2000 | 1900 | 7.75 |
| C | B | 73 | 248 | 789 | 365 | 2405 | 14.5 | 6.75 | 2725 / 2800 | 2575 / 2800 | 8.75 |
| B | B | 72 | 248 | 789 | 342 | 2406 | 12.5 | 6.75 | 2720 | 2570 | 9.0 |
| C | B | 73 | 248 | 789 | 342 | 2406 | 13.0 | 6.75 | 2720 | 2570 | 9.0 |
| C | B | 73 | 248 | 839 | 342 | 2406 | 13 | 7.5 | 2240 | 2120 | 8.25 |
| C | B | 73 | 262 | 867 | 374 | 2644 | 13.5 | 7.5 | 2720 | 2570 | 8.5 |
| C | B | 73 | 262 | 867 | 374 | 2644 | 13.5 | 7.5 | 2500 | 2360 | 7.75 |
| C | B | 73 | 283 | 895 | 388 | 2730 | 14 | 8.25 | 3350 | 3070 | 9.0 |
| C | B | 73 | 283 | 895 | 388 | 2730 | 14 | 8.25 | 3000 | 2800 | 9.0 |
| B | B | 73 | 283 | 895 | 412 | 2730 | 16 | 8.25 | 3000 | 2800 | 9.0 |
| B | B | 73 | 305 | 923 | 424 | 2815 | 12 | 9 | 3150 | 2900 | 8.5 |
| B | B | 73 | 386 | 919 | 425 | 3018 | 12.5 | 12.25 | 4000 | | 9.0 |
| B | B | 73 | 438 | 931 | 419 | 2821 | 12.5 | 14 | 4500 | | 9.0 |
| B | B | 73 | 446 | 895 | 406 | 2712 | 15.5 | 15 | 4500 | | 9.0 |
| C | B | 71 | 254 | 1020 | 462 | 3166 | 14 | 7.5 | 2800 | 2650 | 8.5 |
| B | B | 72 | 279 | 1050 | 489 | 3203 | 15.5 | 8.25 | 3150 | 2900 | 8.5 |
| B | B | 72 | 300 | 1084 | 478 | 3306 | 17 | 9 | 3550 | 3150 | 8.5 |
| B | B | 73 | 320 | 1124 | 520 | 3430 | 17.0 | 9 | 4250 | 4000 | 8.75 |
| B | B | 73 | 320 | 1124 | 520 | 3430 | 21.0 | 9 | 4000 | 3350 | 8.75 |
| C | B | 73 | 255 | 930 | 400 | 2837 | 14 | 8.25 | 2500 | 2300 | 7.0 |
| C | B | 73 | 276 | 958 | 414 | 2922 | 14.5 | 8.25 | 3350 | 3150 | 9.0 |
| C | B | 73 | 276 | 1012 | 446 | 3087 | 14.5 | 8.25 | 3250 | 3000 | 8.5 |
| B | B | 73 | 292 | 926 | 435 | 2806 | 13.0 | 9 | 3350 | 3075 | 9.0 |
| C | B | 73 | 292 | 926 | 435 | 2806 | 18.0 | 9 | 3350 | 3075 | 9.0 |
| B | B | 73 | 298 | 1044 | 461 | 3184 | 15.0 | 9 | 3750 | 3250 | 8.5 |
| C | B | 73 | 298 | 1044 | 486 | 3184 | 20.0 | 9 | 3550 | 3150 | 8.5 |
| C | B | 75 | 298 | 1044 | 488 | 3187 | 16 | 9 | 3750 | 3250 | 8.5 |
| C | B | 73 | 298 | 1044 | 486 | 3184 | 20.5 | 9 | 3550 | 3150 | 8.5 |
| B | B | 73 | 313 | 950 | 445 | 2878 | 13.0 | 9 | 3550 | 3150 | 9.0 |
| B | B | 73 | 313 | 950 | 445 | 2878 | 18.0 | 9 | 3550 | 3150 | 9.0 |


TECHNICAL SPECIFICATIONS

| Size | Pattern | L/S-index | L/S-index 2 | PR | TL/TT | M+S | 3PMSF | Position | Use | Fuel efficiency |
|-------------|---------|-----------|-------------|----|--------|-----|-------|------------|----------|-----------------|
| 295/80R22.5 | BLW18 | 152/148M | | 16 | TL | M+S | 3PMSF | Drive axle | Winter | E |
| 315/70R22.5 | BL203+ | 156/150L | 154/150M | 18 | TL | M+S | 3PMSF | Steer axle | Regional | D |
| 315/70R22.5 | BL806+ | 154/150L | 152/148M | 16 | TL | M+S | 3PMSF | Drive axle | Regional | D |
| 315/70R22.5 | BLW12 | 156/150M | 154/150L | 18 | TL | M+S | 3PMSF | Steer axle | Winter | E |
| 315/80R22.5 | BL621 | 158/150K | | 22 | TL | M+S | 3PMSF | All | On/Off | D |
| 315/80R22.5 | BL826+ | 156/150K | | 20 | TL | M+S | 3PMSF | Drive axle | On/Off | D |
| 315/80R22.5 | BL203+ | 158/150L | 154/150M | 22 | TL | M+S | 3PMSF | Steer axle | Regional | D |
| 315/80R22.5 | BL806+ | 156/150L | 154/150M | 20 | TL | M+S | 3PMSF | Drive axle | Regional | D |
| 315/80R22.5 | BLW12 | 156/150L | 154/150M | 20 | TL | M+S | 3PMSF | Drive axle | Winter | E |
| 315/80R22.5 | BLW18 | 156/150L | | 20 | TL | M+S | 3PMSF | Drive axle | Winter | E |
| 385/55R22.5 | BL606 | 160J | | 20 | TL | M+S | 3PMSF | Trailer | On/Off | D |
| 385/55R22.5 | BLT05 | 160J/158L | | 20 | TL | M+S | | Trailer | Regional | D |
| 385/55R22.5 | BLW12 | 160K | | 20 | TL | M+S | 3PMSF | Steer axle | Winter | E |
| 385/65R22.5 | BL606 | 164J | | 24 | TL | M+S | 3PMSF | Trailer | On/Off | D |
| 385/65R22.5 | BL219 | 164J | | 24 | TL | | | Steer axle | Regional | C |
| 385/65R22.5 | BLT08 | 160K | 158L | 20 | TL | M+S | 3PMSF | Trailer | Regional | D |
| 385/65R22.5 | BLW12 | 160K/158L | | 20 | TL | M+S | 3PMSF | Steer axle | Winter | E |
| 425/65R22.5 | BL605 | 165J | | 20 | TL | M+S | | Trailer | Regional | D |
| 425/65R22.5 | BL606 | 165J | | 20 | TL | M+S | 3PMSF | Trailer | On/Off | D |
| 445/65R22.5 | BL606 | 169J | | 20 | TL | M+S | 3PMSF | Trailer | On/Off | D |
| 12.00R24 | BL601 | 156/153K | | 18 | TT SET | M+S | 3PMSF | All | On/Off | D |
| 12.00R24 | BL601 | 156/153K | | 18 | TL | M+S | 3PMSF | All | On/Off | D |

*While stocks last

| Grip on wet surface | Noise class | Noise emission (wave) | Width (mm) | Diameter (mm) | Load bearing radius (mm) | Rolling circumference (mm) | Tread depth (mm) | Recommended wheel | Bearing capacity per tyre | | Air pressure (bar) |
|---------------------|-------------|-----------------------|------------|---------------|--------------------------|----------------------------|------------------|-------------------|---------------------------|-------------|--------------------|
| | | | | | | | | | Single (kg) | Dual (kg) | |
| C | B | 73 | 298 | 1044 | 486 | 3184 | 20.5 | 9 | 3550 | 3150 | 8.5 |
| B | B | 73 | 312 | 1014 | 468 | 3093 | 15.0 | 9 | 4000 / 3750 | 3350 / 3350 | 9.0 |
| C | B | 73 | 312 | 1014 | 468 | 3093 | 20.0 | 9 | 3750 / 3550 | 3350 / 3150 | 9.0 |
| C | B | 75 | 312 | 1014 | 466 | 3073 | 15 | 9 | 4000 | 3350 | 9.0 |
| B | B | 73 | 312 | 1076 | 500 | 3280 | 17.0 | 9 | 4250 | 3350 | 8.5 |
| B | B | 73 | 312 | 1076 | 500 | 3280 | 21.0 | 9 | 4000 | 3350 | 8.5 |
| B | B | 73 | 312 | 1076 | 474 | 3282 | 15.0 | 9 | 4000 | 3350 | 8.5 |
| C | B | 73 | 312 | 1076 | 500 | 3282 | 20.0 | 9 | 4000 / 3750 | 3350 / 3350 | 8.5 |
| C | B | 75 | 312 | 1076 | 501 | 3281 | 15.5 | 9 | 4000 | 3350 | 8.5 |
| C | B | 73 | 312 | 1076 | 500 | 3282 | 20.0 | 9 | 4000 | 3350 | 8.5 |
| B | B | 73 | 386 | 996 | 443 | 3018 | 16.5 | 11.75 | 4500 | | 9.0 |
| B | B | 72 | 386 | 996 | 443 | 3018 | 15.5 | 11.75 | 4500 | 4250 | 9.0 |
| C | B | 75 | 386 | 996 | 463 | 3004 | 14.5 | 11.75 | 4500 | | 9.0 |
| B | B | 73 | 389 | 1072 | 474 | 3248 | 16.5 | 11.75 | 5000 | | 9.0 |
| C | B | 73 | 389 | 1072 | 495 | 3248 | 13.0 | 11.75 | 5000 | | 9.0 |
| B | B | 73 | 389 | 1072 | 496 | 3248 | 16.5 | 11.75 | 4500 | 4250 | 9.0 |
| C | B | 75 | 389 | 1072 | 496 | 3242 | 15.5 | 11.75 | 4500 | 4250 | 9.0 |
| B | B | 72 | 422 | 1124 | 498 | 3406 | 17.5 | 13 | 5150 | | 8.3 |
| B | B | 73 | 430 | 1124 | 498 | 3406 | 17.5 | 13 | 5150 | | 8.25 |
| B | B | 73 | 444 | 1150 | 511 | 3485 | 18 | 14 | 5800 | | 9.0 |
| B | B | 73 | 313 | 1126 | 537 | 3739 | 17 | 8.5 | 4000 | 3650 | 7.75 |
| B | B | 72 | 313 | 1226 | 537 | 3739 | 17.0 | 8.5 | 4000 | 3650 | 7.75 |

INDEX FOR DESIGNATIONS, LOADS AND SPEEDS

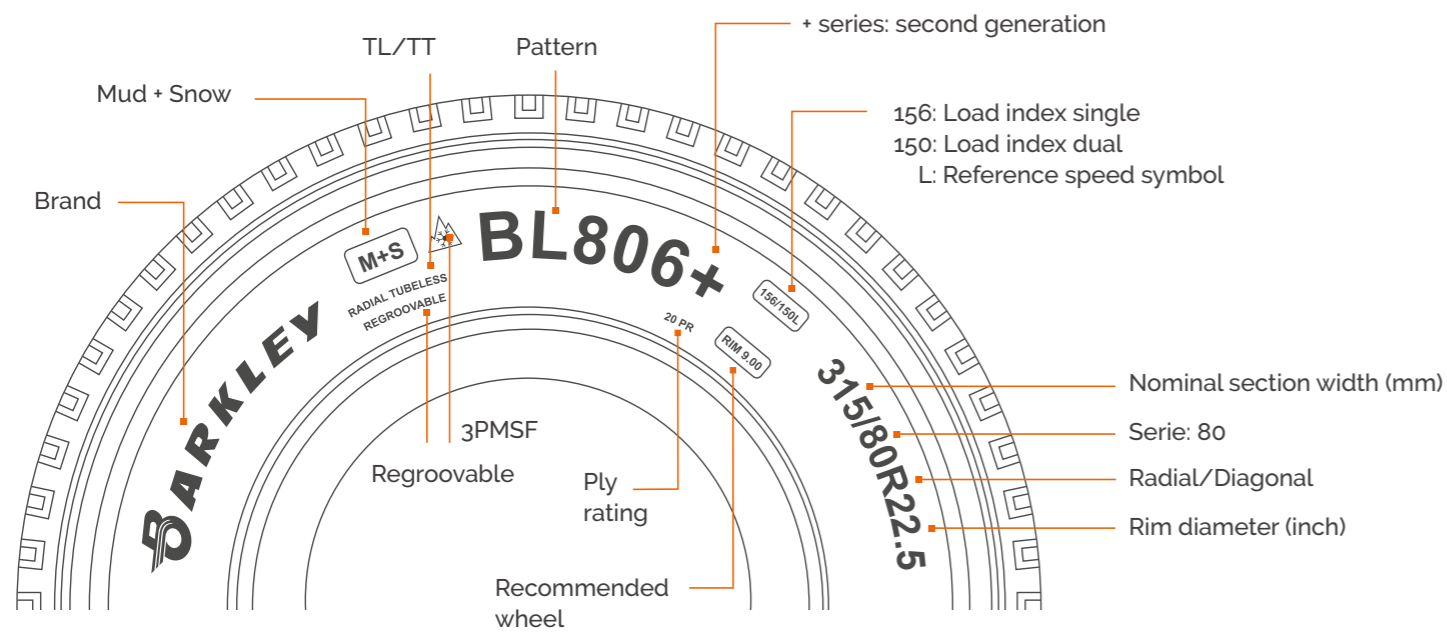

LOAD INDEX

| Loadindex | Bearing capacity in kg | Loadindex | Bearing capacity in kg |
|-----------|------------------------|-----------|------------------------|
| 120 | 1400 | 156 | 4000 |
| 121 | 1450 | 157 | 4125 |
| 122 | 1500 | 158 | 4250 |
| 123 | 1550 | 159 | 4375 |
| 124 | 1600 | 160 | 4500 |
| 125 | 1650 | 161 | 4625 |
| 126 | 1700 | 162 | 4750 |
| 127 | 1750 | 163 | 4875 |
| 128 | 1800 | 164 | 5000 |
| 129 | 1850 | 165 | 5150 |
| 130 | 1900 | 166 | 5300 |
| 131 | 1950 | 167 | 5450 |
| 132 | 2000 | 168 | 5600 |
| 133 | 2060 | 169 | 5800 |
| 134 | 2120 | 170 | 6000 |
| 135 | 2180 | 171 | 6150 |
| 136 | 2240 | 172 | 6300 |
| 137 | 2300 | 173 | 6500 |
| 138 | 2360 | 174 | 6700 |
| 139 | 2430 | 175 | 6900 |
| 140 | 2500 | 176 | 7100 |
| 141 | 2575 | 177 | 7300 |
| 142 | 2650 | 178 | 7500 |
| 143 | 2725 | 179 | 7750 |
| 144 | 2800 | 180 | 8000 |
| 145 | 2900 | 181 | 8250 |
| 146 | 3000 | 182 | 8500 |
| 147 | 3075 | 183 | 8750 |
| 148 | 3150 | 184 | 9000 |
| 149 | 3250 | 185 | 9250 |
| 150 | 3350 | 186 | 9500 |
| 151 | 3450 | 187 | 9750 |
| 152 | 3550 | 188 | 10000 |
| 153 | 3650 | 189 | 10300 |
| 154 | 3750 | 190 | 10600 |
| 155 | 3875 | | |

SPEED INDEX

| Speed symbol | Speed in km |
|--------------|-------------|
| F | 80 |
| G | 90 |
| J | 100 |
| K | 110 |
| L | 120 |
| M | 130 |
| N | 140 |



Zwedenweg 17
7772 TC Hardenberg
The Netherlands

T +31 (0)523 850 850
F +31 (0)523 850 855

barkleytyres.com